


Specification

Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	12 Ah
CCA	200
Approximate Weight (With Acid)	9.04 lbs (4.1 kg)
Recommended Maximum Charging Current Limit	3.6A
Equalization and Cycle Service	14.8 VDC/unit Average at 25°C
Terminal Type	D
Warranty	1 Year Full Replacement

Physical Dimensions: in (mm)

L: 6.00" (152mm) W: 3.44" (87mm) H: 5.80" (146mm)

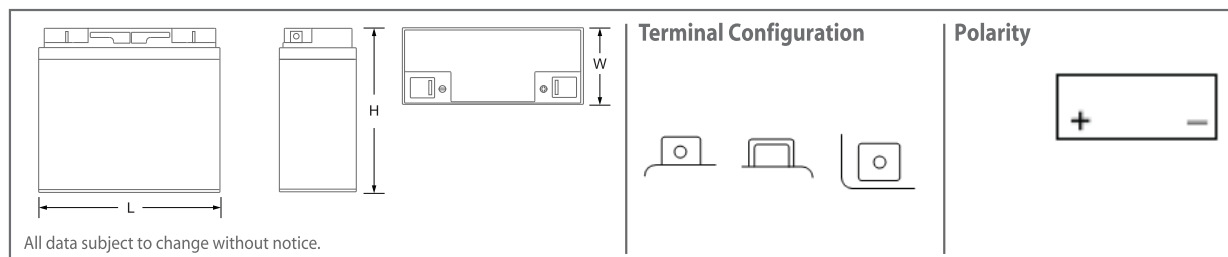

Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle. Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Remove the sealing plugs from electrolyte cells on the battery.
- Remove filler cap strip from electrolyte bottle to expose silver foils. DO NOT remove silver foils.
- Push the bottle down into the cells piercing the seals. Fill your battery with all the contents of the acid pack.
- The bottle contains the exact amount of electrolyte needed for the battery. DO NOT add water.
- After the filling, replace the sealing plugs on each battery cell. Do not remove the sealing plugs for charging.

Charging Instructions

- Charge the battery fully before installing.
- Never charge the battery with a charger that delivers more than 4 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with the Adventure Power[®] Maintainer 4000 battery charger.
- This charger maintainer can remain connected to the battery indefinitely.